

LED ULTRA-LOW HOODED SURFACE FLOODLIGHT

HP2050


The heavy-duty hooded surface floodlight illuminates the deck and protects the pilot from glare while landing on the pad.

The fixture is housed in a weather tight, aluminum casting and powder coated yellow for high visibility. There are three mounting holes for easy installation on any surface.



Replacement Part:

- HP2053 9-watt LED Light Head

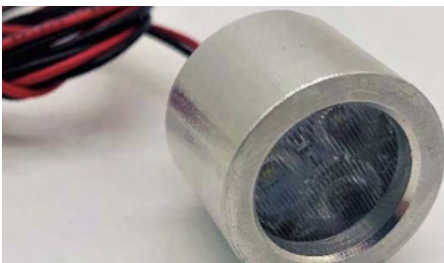

KEY FEATURES:

- Ultra-Low Profile, under 2 inches
- Individually replaceable LED heads
- High-visibility yellow cast aluminum body suitable for the harshest environments
- Pre-wired for quick and easy installations

TECHNICAL DETAILS

Operating Voltage:
120V/277V 50/60Hz


Max Power Consumption:
54 watts, 1050ma @ 120V

Operating Lifespan:
LED's Rated to 40,000 hrs

Light Source:
(6) Custom triple LED heads

Operating Temperature:
- 40°F to 131°F
- 40°C to + 55°C

PRODUCT DETAILS:

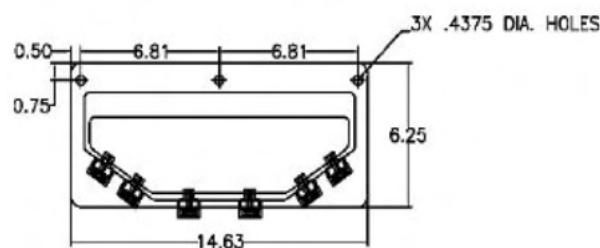

NOTES:

- 1) (3) 16 GAUGE WIRES
(1) BLACK
(1) WHITE
(1) GROUND
- 2) 3/8" NPT LOCATED ON BACK OF FLOODLIGHT
- 3) 63 W / 1.05 amps

