


PAD-STAR® AC ELEVATED GROUND MOUNT - 2ND GENERATION

HP2000 SERIES

This newly redesigned Ground perimeter light is the latest addition to the FEC Heliports line of high quality LED lights.

Perimeter and Obstruction lights are one of the most important safety features on your heliport. They are used to mark and illuminate the FATO, TLOF, and Obstructions as well as to help the pilot locate the pad and safely land during night operations and inclement weather conditions.

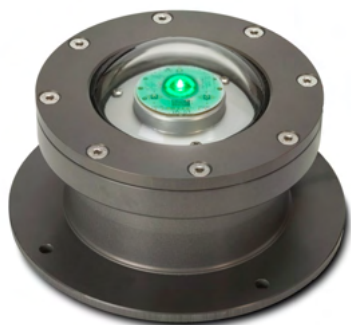

AC GROUND MOUNTED
PERIMETER LIGHT

KEY FEATURES:

- Hermetically sealed optical assembly to mitigate condensation
- Infra-Red equipment standard on all PadStar Series lighting
- NVG Compatible
- 10-Year Limited Warranty
- Engineered and designed to be universally compatible with any existing heliport lighting system
- Mil-spec anodized cast aluminum body suitable for the harshest environments
- Pre-wired for quick and easy installations

TECHNICAL DETAILS

<p>OPERATING VOLTAGE: 100-240 VAC, 50/60Hz</p>	<p>OPERATING LIFESPAN: LED's Rated to 50,000 hrs</p>	<p>STANDARD PART NUMBERS: HP2090G True Green (528nm) HP2093G Blue (470nm) HP2091G White 6000K HP2092G Yellow/Amber (590nm) HP2081G Red</p>
<p>OPERATING POWER: 6 Watts @ 0.350ma</p>	<p>LIGHT SOURCE: 1x Osram Visible LED 3x Osram IR Diodes</p>	
<p>OPERATING TEMPERATURE: - 40°F to 131°F - 40°C to + 55°C</p>		

PAD-STAR® AC ELEVATED GROUND MOUNT - 2ND GENERATION

PHOTOMETRIC:

Standards
U.S. Department of Transportation, Federal Aviation Administration,
Memorandum, Heliport Perimeter Light for Visual Meteorological
Conditions. Engineering Brief No. 87

Parameter	Requirement	Measured	Result
Min. Peak Intensity	5 cd from 16° - 90°	12.6 cd	Pass
Min. Peak Intensity	10 cd from 0° - 15°	23.3 cd	Pass
Min. Avg Intensity	15 cd from 0° - 15°	46.7 cd	Pass

cd = Candela

Standards
International Civil Aviation Organization (ICAO):
Aerodromes, Annex 14, Volume 2, Fourth Edition, dated July 2013
Aerodromes, Annex 14, Volume 1, Seventh Edition, dated July 2016

Parameter	Requirement	Measured	Result
Min. Peak Intensity	3 cd from 21° - 90°	12.6 cd	Pass
Min. Peak Intensity	8 cd from 13° - 20°	36.1 cd	Pass
Min. Peak Intensity	15 cd from 11° - 13°	51.5 cd	Pass
Min. Peak Intensity	30 cd from 6° - 10°	41.7 cd	Pass
Min. Peak Intensity	15 cd from 2° - 5°	30.9 cd	Pass

Test Purpose - Performance Testing (Photometry and Chromaticity)

Test Dates - December 11, 2018

STANDARDS AND CERTIFICATIONS:

- FAA EB#87, L-860HR & HS
- FAA AC 150/5390-2 (Latest Rev.), Heliports Design Guide
- ICAO Annex 14, Volume II
- UK CAP 437
- UK CAP 1264

PHYSICAL CHARACTERISTICS:

Overall Dimensions:

- Height Above Surface: 4 1/4"
- Body Diameter: 6 1/2"
- Mounting Flange: 8.0"

Mounting Pattern:

- 7 1/6" BHC, 4 equally spaced 5/16" holes

Flange Material:

- 6061-T6, QQA200/88
- 356-T6 Aluminum Alloy

Lens:

- Tempered Borosilicate

Hardware:

- 18-8 Stainless Steel

Finish:

- Hard Anodize per MIL-A-8625 Type II, Class 1

PRODUCT DETAILS:

